


Last information update: October 2024

Product configuration: MQ17

MQ17: Ceiling-mounted luminaire - warm LED - General light - DALI dimmable control gear

**Product code**MQ17: Ceiling-mounted luminaire - warm LED - General light - DALI dimmable control gear **Attention! Code no longer in production****Technical description**

LED lamp, ceiling-mounted luminaire; integrated DALI dimmable control gear. Die-cast aluminium plate for surface mounting with diffuser element; technical, shaped aluminium sheet brackets for components and optics; multi-faceted reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer; safety glass cover over LED lamp; lathe-shaped aluminium cylindrical body; lower ring in high resistance polycarbonate. General lighting optic.

Installation

Plate fixed to ceiling using screws and screw anchors (not included); bayonet assembly systems ensuring simple installation and maintenance; snap-on spring fastening for reflector. Wall or pendant application option available thanks to special accessory kits with a separate code.

Colour

White (01) | Grey (15)

Weight (Kg)

3

Mounting

wall surface|ceiling surface|ceiling pendant

Wiring

Control gear integrated in luminaire; mains and optic unit connections made with quick coupling terminal blocks. Touch-dim push-button dimming option (see instruction sheet)

Notes

Kit for wall-mounting: code no. 9443 - kit for steel cable pendant system L 1500: code no. 9441

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3399	Colour temperature [K]:	3000
W system:	28.8	MacAdam Step:	2
lm source:	4000	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	25	Lamp code:	LED
Luminous efficiency (lm/W, real value):	118	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	85	Control:	DALI
CRI:	80		


Polar

<p>Imax=1685 cd α=98°</p>	<p>CIE nL 0.85 70-97-99-100-85 UGR 23.1-23.0 DIN A.51 UTE 0.85B+0.00T F*1=702 F*1+F*2=971 F*1+F*2+F*3=994</p>	Lux			
		h	d	Em	Emax
		1	2.3	1058	1508
		2	4.6	264	377
		3	6.9	118	168
4	9.2	66	94		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	58	53	50	57	53	52	48	56
1.0	70	64	60	56	63	59	58	54	64
1.5	78	73	69	66	72	68	68	64	75
2.0	82	78	75	73	77	74	73	70	82
2.5	84	81	79	77	80	77	76	73	86
3.0	85	83	81	79	81	80	79	75	89
4.0	87	85	83	82	83	82	81	78	91
5.0	88	86	85	84	85	83	82	79	93

Luminance curve limit

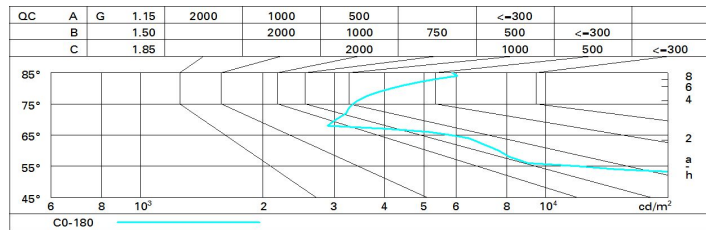

UGR diagram

Corrected UGR values (at 4000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	23.4	24.2	23.7	24.4	24.7	23.4	24.2	23.7	24.4	24.7
	3H	23.3	24.0	23.6	24.3	24.6	23.3	24.0	23.6	24.3	24.6
	4H	23.2	23.9	23.6	24.2	24.5	23.3	23.9	23.6	24.2	24.5
	6H	23.2	23.8	23.6	24.1	24.4	23.2	23.8	23.5	24.1	24.4
	8H	23.2	23.8	23.6	24.1	24.4	23.1	23.7	23.5	24.0	24.4
12H	23.2	23.7	23.6	24.1	24.4	23.1	23.6	23.5	24.0	24.3	
4H	2H	23.3	23.9	23.6	24.2	24.5	23.2	23.9	23.6	24.2	24.5
	3H	23.2	23.7	23.5	24.0	24.4	23.2	23.7	23.6	24.1	24.4
	4H	23.1	23.6	23.5	24.0	24.3	23.1	23.6	23.5	24.0	24.3
	6H	23.1	23.5	23.5	23.9	24.3	23.0	23.5	23.5	23.9	24.3
	8H	23.1	23.5	23.5	23.9	24.3	23.0	23.4	23.5	23.8	24.2
12H	23.1	23.4	23.5	23.9	24.3	23.0	23.3	23.4	23.7	24.2	
8H	4H	23.0	23.4	23.5	23.8	24.2	23.1	23.5	23.5	23.9	24.3
	6H	23.0	23.3	23.5	23.8	24.2	23.0	23.4	23.5	23.8	24.3
	8H	23.0	23.3	23.5	23.8	24.3	23.0	23.3	23.5	23.8	24.3
	12H	23.1	23.3	23.6	23.8	24.3	23.0	23.2	23.5	23.7	24.2
12H	4H	23.0	23.3	23.4	23.7	24.2	23.1	23.4	23.5	23.9	24.3
	6H	23.0	23.2	23.5	23.7	24.2	23.1	23.3	23.6	23.8	24.3
	8H	23.0	23.2	23.5	23.7	24.2	23.1	23.3	23.6	23.8	24.3
Variations with the observer position at spacing:											
S =	1.0H	1.7 / -5.1					1.7 / -5.1				
	1.5H	2.6 / -6.3					2.6 / -6.3				
	2.0H	4.5 / -7.6					4.5 / -7.6				